

Flushfit Recessed Track

UNDERNEATH VIEW:



SIDE VIEW:



The Flushfit track has been designed with Architects in mind. The track sits inside the ceiling lining and requires no brackets for installation.

The height of the track is 13mm which is the standard thickness of ceiling lining sheet used in New Zealand (GIB) and Australia (Gyprock).

Builders need to allow for a parallel gap of 16mm in the ceiling sheet to accommodate the track, which has a 5mm flange either side of the glide channel for the cut edge of the ceiling sheet to sit on, making for a superior professional finish.

The track length is available in continuous 6 meter lengths. When installations exceed 6 meters, tracks need to butt together.

Tracks are pre drilled at 500mm centres with 3.5mm counter sunk holes and timber counter sunk fixing screws supplied.

The track is available in our standard "Classic White".

The track will carry standard Boldtrak glides or S-Fold glides and tape.


Components:




FLUSH FIT END STOP



STANDARD GLIDERS

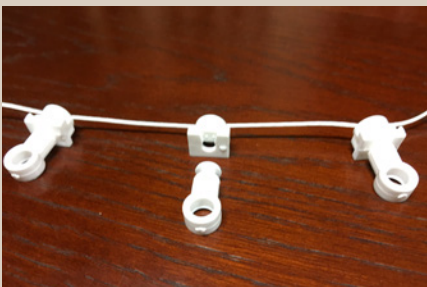

S-FOLD GLIDERS

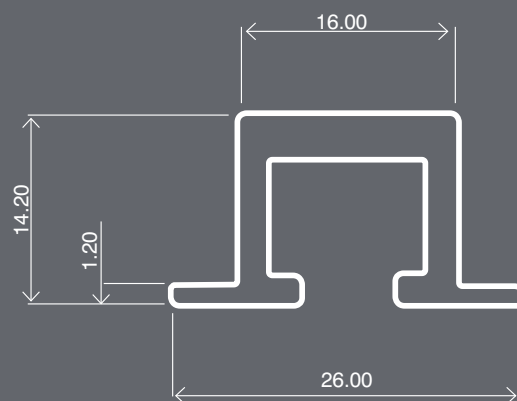

All measurements are in mm.