




VANDA FLUSH FIT TRACK

Flush Fit track Profile - 13mm
Also now available in 10mm

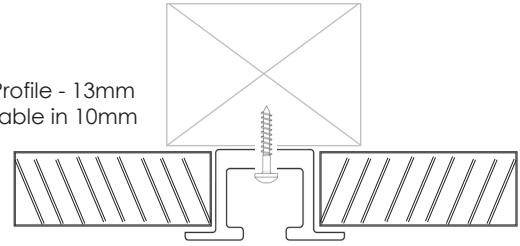

The Flush Fit Track is a recessed curtain track installed directly into the ceiling, eliminating the need for brackets.

Our original Flush Fit Track is 13mm high, matching the thickness of Gyprock ceiling lining and offering maximum clearance for carriers.

We also offer a 10mm option to suit 10mm Gyprock.

Builders must provide timber fixings above the track rebate, and when fitting the Gyprock lining, they should allow for an 18mm parallel gap in the ceiling sheet to accommodate the track width. The track features a 5mm flange on either side of the glide channel, ensuring a clean finish as the ceiling sheet rests on the flange edges.

Tracks are available in continuous lengths of up to 6 meters. For longer installations, tracks will need to be butted together. Elbows with bend radius of 150mm or 250mm are available. You can order bend elbows to assist builders in achieving precise ceiling cuts for a flawless installation.

The standard off-set from the wall for a single track is 50mm or 60mm (you can go as close to 30mm if necessary but this distance will not allow for a wave heading). For straight double track systems, the required spacing between tracks ranges from 50mm to 90mm. For bent tracks, a fixed spacing of 95mm is needed, with no adjustment possible.

There is a choice of standard glides and end stops for pleated style curtain headings or Wave and S Fold Heading, please contact our office for further details.

Flush Fit track is supplied pre-punched at 500mm centres and has a screw head rebate running through the entire length of the track. For the Flush Fit track low profile screws are currently supplied, and a 50mm drive bit should be used carefully to avoid damaging the track

Tracks should be ordered 11mm shorter than the given length so that access to the glides is possible without having to take down the track with the use of an end cap cover.

Please note - if Flush Fit tracks are measured to fit between walls without End caps tracks will need to have the glides fed onto the track before you screw it into place.

Fitters are to position one end of the track hard up to one end to allow the 11mm gap at the other. The end cap cover covers the gap.

Flush Fit track comes in our standard "White" and can also be custom powdercoated to suit - POA



(03) 9335-6355
sales@vandavictoria.com.au
www.vandavic.com.au